

EFSWJ5PS

Plastic Shallow Well Jet Tank System

FEATURES

- Capacity To 7.5 GPM
- Dual Voltage (115/230V) 1/2 HP Motor Includes Thermal Protection
- Non-corrosive Thermoplastic Pump Housing
- Internal High Performance Jet Nozzle And Venturi
- 5-Gallon Pressure Tank - Factory Set Pre-charge
- Plumbing From Pump To Tank Is Complete And Ready For Installation
- 30-50 PSI Pressure Switch
- Pump/Motor/Pressure Tank And Pressure Switch Assembly - Ready For Easy "Out Of The Carton" Installation

SPECIFICATIONS


UPC	WARRANTY	WEIGHT	DIMENSIONS (L x W x H)	PALLET QUANTITY
851953007857	1 Year	49 lbs.	26" x 15.5" x 25"	10

PERFORMANCE CHART

MODEL	HP	MOTOR VOLTAGE	PRESSURE SWITCH SETTINGS	DISTANCE PUMP ABOVE WATER					PRESSURE SHUT-OFF AT MAX. DEPTH
				5'	10'	15'	20'	25'	
				GALLONS PER MINUTE PUMPED*					
EFSWJ5P	1/2	115/230	30-50	7.5	6.5	5.5	5	3.9	61 PSI

* Performance shown in GPM (gallons per minute) at 40 PSI (pounds per square inch) discharge pressure. (ORDER JET PACKAGE 090JEJ001 * SEPARATELY)

EASY INSTALLATION

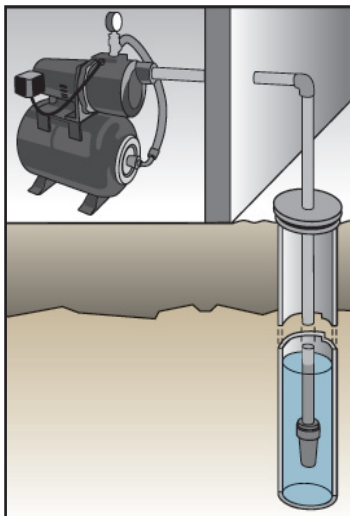

ECO-FLO PRODUCTS INCORPORATED

1899 Cottage Street, Ashland, Ohio 44805 • Customer Service: 1-877 326-3561 • Fax: 1-877 326-1994 • www.ecofloproducts.com